



Up to 240 bar - 151 lpm


Symbol

Operation

The D-SJNVA adjusts from fully open to fully closed by turning the adjustment screw clockwise. When adjusted open the valve regulates flow (1) to (2) or (2) to (1). When fully closed the valve blocks flow from (1) to (2) or (2) to (1).

This valve can be used to vary flow and also as a shut-off valve.

Adjustment

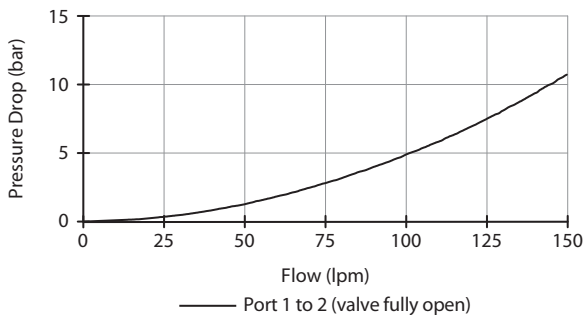
Turn  to decrease flow and shut off.

Features

- Hardened cage and spool for long life.
- Industry common cavity.

Performance

32 cSt / 38°C.


Specifications

Nom. Flow (lpm)	151
Max. Pressure (bar)	240
Hydraulic Oil	General purpose hydraulic fluid
Viscosity Range	3 to 640 cSt
Filtration	ISO 18/16/13
Operating Temp.	-37 to 93°C
Cartridge Torque	122 Nm
Cavity	SJ16-2 (see cavity data page CAV-SJ16-2)
Spare Seal Kit (Viton)	SK-DSJVHD
Weight - Valve only	0.37 kg
Weight - Valve + Body	0.94 kg (alum) 2.00 kg (steel)

