
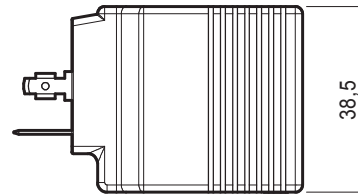
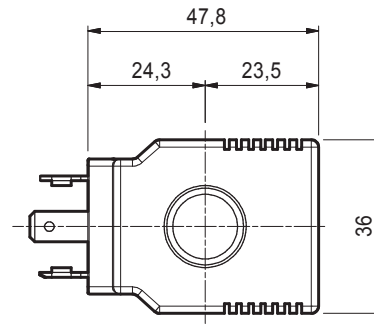











**Features**

- One piece encapsulated design.
- Weatherproof
- Immersion proof.
- Thermal shock / dunk tested.
- No external metal shell.


**Specifications**

Wattage	21 watts nominal
Duty rating	Continuous duty $\pm 10\%$ rated voltage at 49°C ambient
Minimum current for actuation	80% of rated current at room temperature
Magnet wire class	H for all voltages
Temperature range	-40°C to 200°C
Protection degree	IP 67 (achieved with suitable o-rings top & bottom)
Encapsulating material	Thermo-plastic, resistant to moisture, caustic solutions, fungus and vibrations.
Approx. coil weight	0.19 kg


**JJA**

**JDL**

**JJT**

**JDI**

**JHC**

**Ordering Code**

T- **J** **\*\*** — **\*\***

Termination
<b>JA</b> - AMP Superseal
<b>DL</b> - Double Lead
<b>JT</b> - AMP Junior Timer
<b>DI</b> - Deutsch - Integral DT04-2P
<b>HC</b> - EN 175301-803*

Voltage
<b>12</b> - 12VDC / 6.8 Ohm
<b>24</b> - 24VDC / 27 Ohm
<b>26</b> - 26VDC / 32 Ohm

\*Formerly DIN 43650 Hirschmann connector.