




Up to 207 bar - 38 lpm

**Operation**

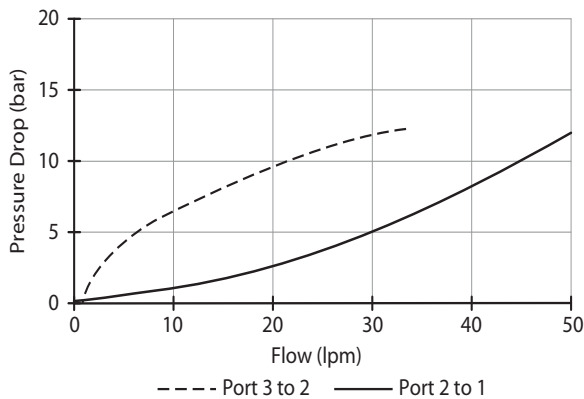
The D-DFPDI blocks flow at (3) and allows flow from (2) to (1). On attainment of a predetermined pressure at (3) the valve shifts to allow flow from (3) to (2) and block flow at (1).

**Features**

- Hardened parts for long life and low leakage.
- Industry common cavity.

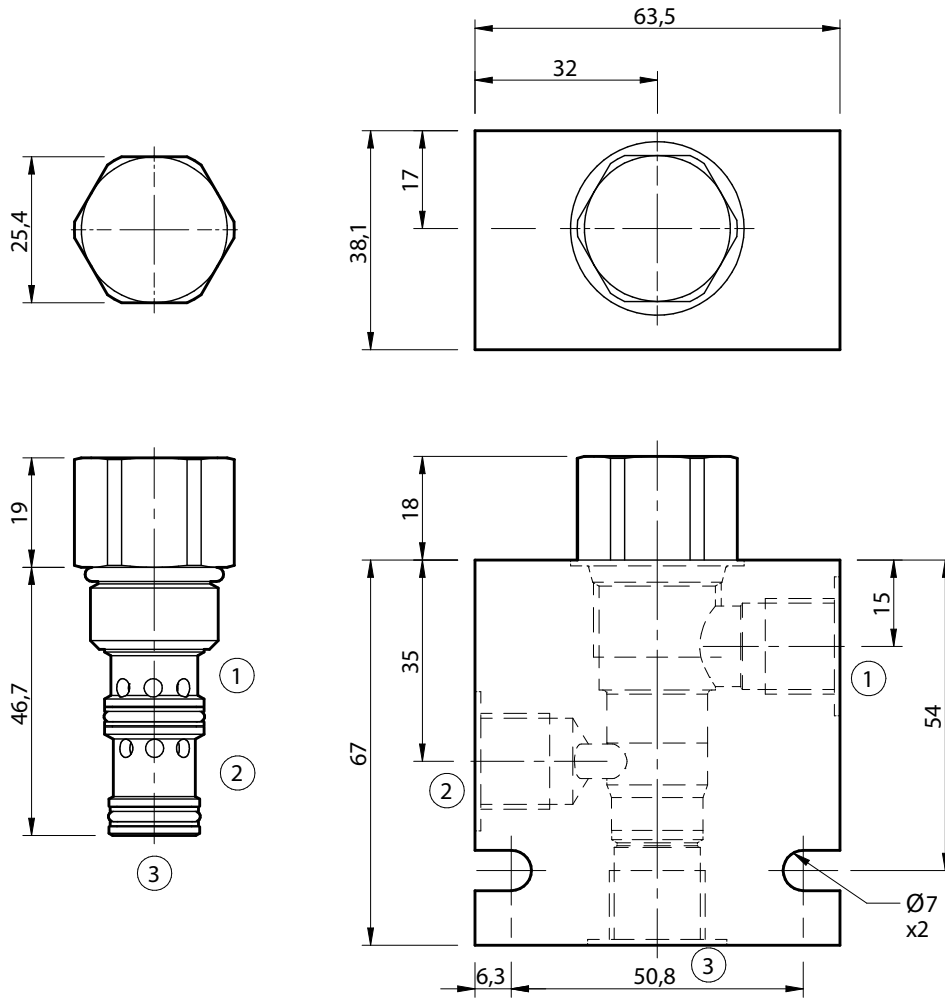
**Symbol**

**Performance**

32 cSt / 38°C.


**Specifications**

Nom. Flow (lpm)	38
Max. Pressure (bar)	207
Internal Leakage (32 cSt)	82 cc/min
Hydraulic Oil	General purpose hydraulic fluid
Viscosity Range	3 to 640 cSt
Filtration	ISO 18/16/13
Operating Temp.	-40 to 120°C
Cartridge Torque	40.6 Nm
Cavity	DF10-3 (see cavity data page <b>CAV-DF10-3</b> )
Spare Seal Kit (Viton)	SK-DDFVDD
Weight - Valve only	0.26 kg
Weight - Valve + Body	0.63 kg (alum) 1.32 kg (steel)

**Dimensions**  
[mm]



**Ordering Code**

