


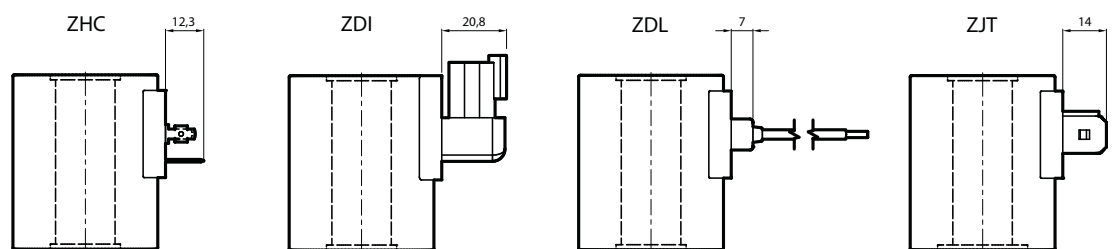
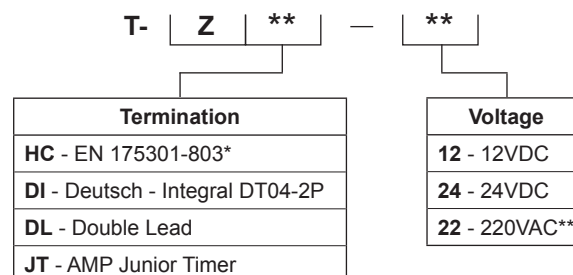



**Features**

- One piece encapsulated design.
- Weatherproof
- Immersion proof.
- Thermal shock / dunk tested.
- No external metal shell.


**Specifications**

Wattage	27 watts nominal
Duty rating	Continuous duty $\pm 10\%$ rated voltage at 49°C ambient
Minimum current for actuation	80% of rated current at room temperature
Magnet wire class	H
Temperature range	-30°C to 60°C
Protection degree	IP 65 (with connector and suitable seals)
Encapsulating material	Glass filled polyester, resistant to moisture, caustic solutions, fungus and vibrations.
Approx. coil weight	0.25 kg


**Ordering Code**


\*Formerly DIN 43650 Hirschmann connector.

\*\*Without internal rectifier (for HC termination only) supply voltage must be externally rectified.